



### 3. Applications

- Unmanned cellular shelters
- Cooling cabins
- ATM centers
- Server room

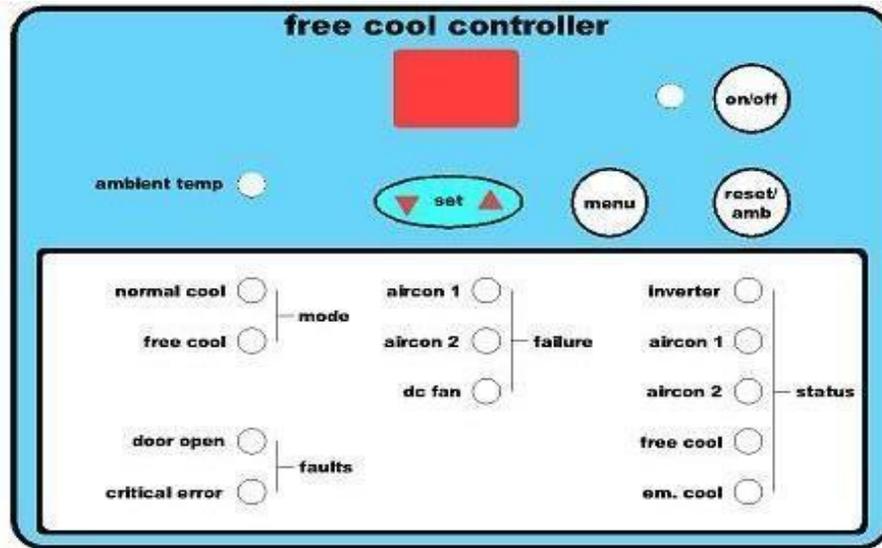


Fig.2 Details of deco panel of the system

### 4. Electrical specification

DC Power input ( Volts)			Power consumption	Output relay rating			
Min	Typ.	Max		Aircon	DC Fan	Inverter	Alarms
40	48	56	6.5W max.	20A, 250VAC	10A, 48VDC	5A, 250VAC	5A, 250VAC

#16, Pillaiyar Kovil Street, Kanagam, Taramani (PO), Chennai-600 113, INDIA.

🌐 [www.presevi.in](http://www.presevi.in) ✉ [marketing@presevi.in](mailto:marketing@presevi.in) / [admin@presevi.in](mailto:admin@presevi.in)

☎ +91 44 2254 2354 📞 +91 9382150289, +91 944412563, +91 8148750285, 📱 +91 8148750285

**An ISO certified Company with independent R&D division**